

# Acetylene Regulators – Compact




Part no - 30GE-REG-ACT-TRA002

Inlet pressure – Air @ 70 degree Fahrenheit

----- 2000 psi

----- 200 psi

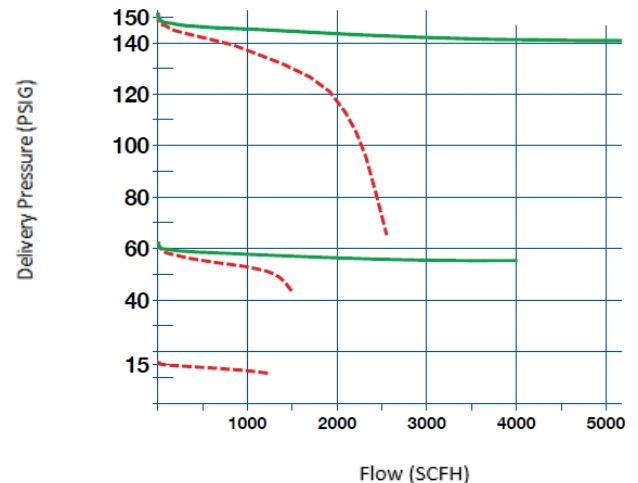

Suggested Operating Pressure Range

15,30,60,150 PSIG

## Features

- ✓ Easy to read high contrast gauges for clarity.
- ✓ Rubber cover for gauge protection.
- ✓ Color coded knobs indicate gas type, for better comfort when adjusting gas pressure.
- ✓ Forged brass body.
- ✓ Meets industry safety standards.
- ✓ Larger regulator body for heavy duty applications.
- ✓ High strength alloy bonnet with nearly twice the yield strength of brass.
- ✓ Single stage regulator.

## Technical Specification

Part no	30GE-REG-ACT-TRA002
Connection inlet	CGA 993
Connection outlet	9/16"-18
Maximum input pressure (bar)	40
Max working pressure (bar)	2
Capacity	5 m3/h
Scale working pressure gauge (bar)	0-1
Compliance with ISO 2503	Yes
Weight (Kg)	1.29

Techweld Industrial Technologies Ltd, Office 1078 Great Northern House, 275 Densgate, M3 4EL, Manchester, United Kingdom.